


# 2000 Series *Standard Duty Rim Exit Device*

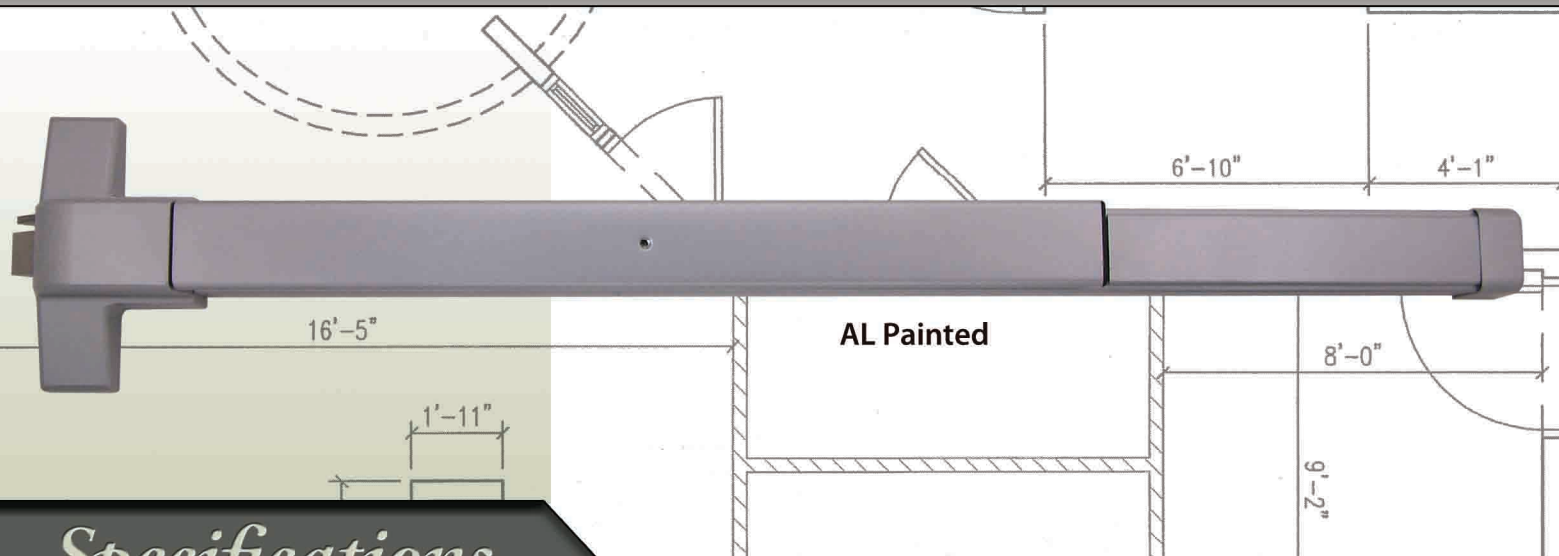

## Specifications

**ANSI :** Meets ANSI A156.3 - Grade 1 Standards

**UL Listings :** UL Listed for Panic Exit Hardware

UL Listed for "A" Label 3 Hour Fire Doors

**ADA :** Meets ADA requirements ANSI A117.1 with Lever Trim

**Handing :** Non Handed - Completely Reversible

**Construction :** Roll Formed Steel or Stainless Steel Channel & Steel Chassis  
Steel or Stainless Steel Headcover & End Cap

**Finishes :** Aluminum, Dark Bronze, Gold Painted & US32D

**Latchbolt :** Deadlocking latchbolt with 5/8" projection

**Strike :** Roller Strike with 5/8" projection with 1/8" shim

**Dogging :** Hex Key Dogging Standard on Panic Exit Hardware

**Device Lengths :** 33" for 3'-0" wide doors and 42" for 3'-8" to 4'-0" wide doors

**Min. Door Width :** 33" & 42" devices can be cut down to fit on 2'-4" wide door

**Center Case Dim. :** 6" Height x 1 5/8" Wide x 2 1/2" Thick - 4" Min. stile required

**Mechanism Case Dim. :** 1 5/8" Height x 1 13/16" Wide

**Projection :** 2 1/2" Undogged - Pushbar Neutral & 1 13/16" Dogged - Pushbar Depressed

**Fasteners :** Wood, Machine & Self Tapping Machine Screws (F2000R includes thru bolts)

**Trim & Accessories :** Wide Variety of Exterior Trims, Shim Kits other accessories available

**Warranty :** Limited Lifetime Warranty



US32D



Gold Painted



BZ Painted



211 Endeavor Drive - PO Box 680  
Rogersville, MO 65742  
PH 877-258-1262 FX 877-888-0150  
www.designhardware.net